


## **Build More Profitably**

With Our Innovative Building Materials

## HIGH R-VALUE INSULATED RIMBOARD

## Cross section of materials

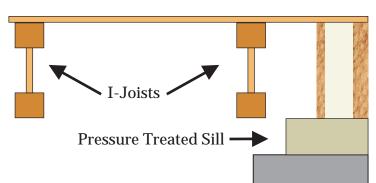

All materials above the foundation are available from National Lumber.

## **R-11 Assembly**

HIGH-Rim Insulated Rimboard consists of two OSB boards and polyurethane foam adhered to create a tightly sealed, **high R-value**, solid R-11 barrier for the perimeter of the beltline.



**Available Exclusively** 

at National Lumber

> Helps your project meet Massachusetts Stretch Energy Code

Foundation

- Insulates a difficult area in floor construction in one step
- Meets APA PRR 401 for non-structural rimboard

➢ 3 ½" thick

**I**Rim

- In Stock Depths: 9 ½", 11 ¾" and 14"
- Convenient pre-assembled 12 foot lengths

When you're looking for **REAL VALUE**, come to National Lumber

Visit national-lumber.com/engineering, speak to your salesman or call 1.800.370.WOOD